

- OW15Y OmniWIRE - AES/EBU multicore cable - n x 2x 0,15 mm<sup>2</sup>, ultra flexible, tinned copper spiral pair shields
- D-Sub 25p., die casted zinc alloy black
- gold-plated contacts
- with transparent heat shrink on both sides for free labeling
- OW15Y OmniWIRE - AES/EBU multicore kabel - n x 2x 0,15 mm<sup>2</sup>, hoch flexibel, verzinneter paar wendelschirm
- D-Sub 25p., zinkdruckguss schwarz
- vergoldete kontakte
- mit transparentem schrumpfschlauch beidseitig zur freien beschriftung




technical data

**cable**  
**channels** 8  
**cable typ** OW15Y OmniWIRE - AES/EBU multicore cable - n x 2x 0,15 mm<sup>2</sup>, ultra flexible , tinned copper spiral pair shields  
**jacket** PVC, soft, matt  
**connectors**  
**connector 1** D-Sub 15p. male  
**contact 1** gold-plated  
**colour code** white  
**connector 2** D-Sub 15p. male  
**contact 2** gold-plated  
**colour code** white  
**screw joint** UNC 4-40

technische daten

**kabel**  
**kanäle** 8  
**kabeltyp** PW.X, Ø 0,22 mm<sup>2</sup>, hochflexibles studio anschluss kabel, XLPE isolation (vernetztes polyethylen)  
**mantel** PVC, soft, matt  
**steckverbinder**  
**anschluss 1** D-Sub 25p. male, metall gehäuse  
**kontakt 1** vergoldet  
**farbcod** weiß  
**anschluss 2** D-Sub 25p. male, metall gehäuse  
**kontakt 2** vergoldet  
**farbcod** weiß  
**verschraubung** UNC 4-40

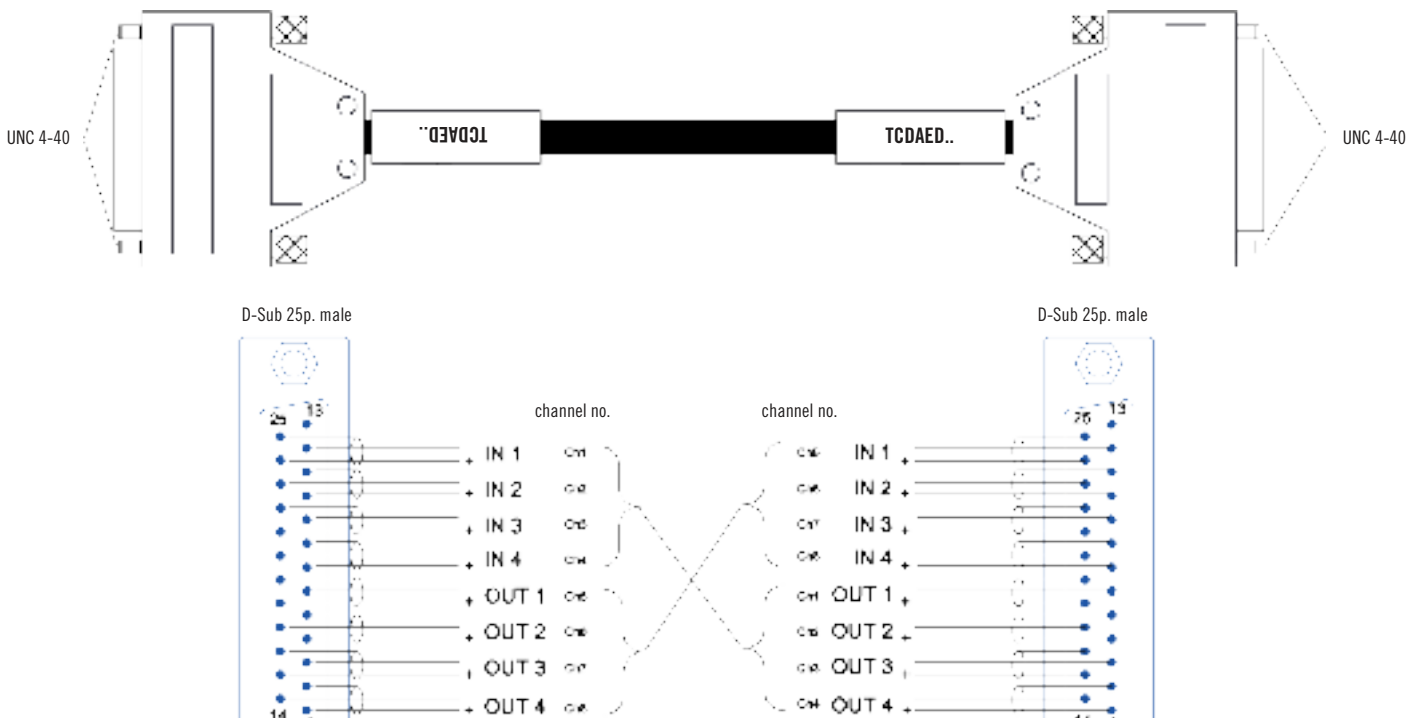

order / variations

bestellung / variationen

order code bestell.-nr.	connector 1 anschluss 1	connector 2 anschluss 2	colour farbe	length länge [m]
TCDAED01.0	D-Sub 25p. male	D-Sub 25p. male	black / schwarz	1
TCDAED01.5	D-Sub 25p. male	D-Sub 25p. male	black / schwarz	1.5
TCDAED02.0	D-Sub 25p. male	D-Sub 25p. male	black / schwarz	2
TCDAED03.0	D-Sub 25p. male	D-Sub 25p. male	black / schwarz	3
TCDAED04.0	D-Sub 25p. male	D-Sub 25p. male	black / schwarz	4
TCDAED05.0	D-Sub 25p. male	D-Sub 25p. male	black / schwarz	5
TCDAED10.0	D-Sub 25p. male	D-Sub 25p. male	black / schwarz	10